

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4

5

6

7

8

9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA66 UL94V-0
Housing: PA66 UL94V-0


2-特性 (characteristics):

额定电压: 50V AC/DC .
Voltage Rating: 50V AC/DC .
额定电流: 1 AMP (AWG #28) .
Raring Current: 1 AMP (AWG #28) .
接触阻抗: ≤20mΩ MAX.
Contact Resistance: ≤20mΩ MAX.
绝缘阻抗: ≥100MΩMIN.
Insulating Resistance: ≥100MΩMIN.
耐电压: 500V AC/MINUTE
Withstanding Voltage: 500V AC/MINUTE
温度范围: -25度至+85度
Temperture Range: -25°Cto +85°C

ORDERING INFORMATION

H 08-XX F X X

NO.OF PINS Per Row 02-20P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
SERLES NO 10:1.0mm	TYPE F=FEMALE M=MALE P=PIERCE	

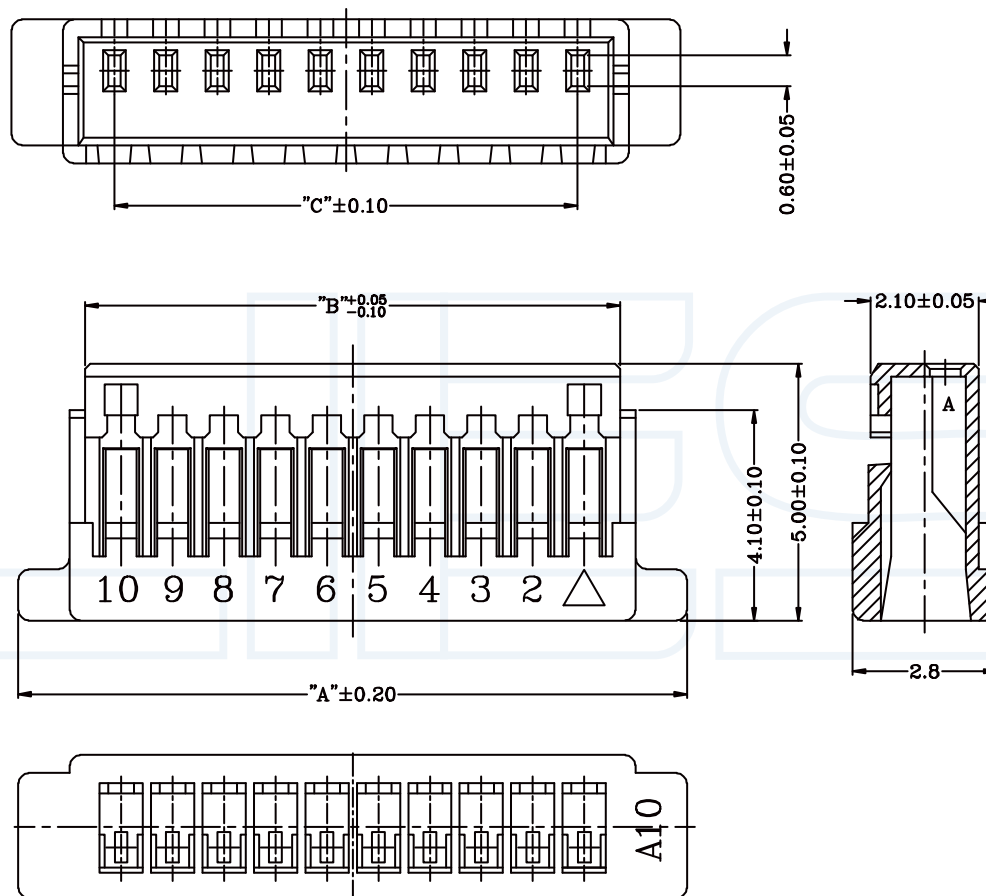

No. of Contacts	DIMENSIONS		
	DIM A	DIM B	DIM C
02	5.00	2.40	1.00
03	6.00	3.40	2.00
04	7.00	4.40	3.00
05	8.00	5.40	4.00
06	9.00	6.40	5.00
07	10.00	7.40	6.00
08	11.00	8.40	7.00
09	12.00	9.40	8.00
10	13.00	10.40	9.00
11	14.00	11.40	10.00
12	15.00	12.40	11.00
13	16.00	13.40	12.00
14	17.00	14.40	13.00
15	18.00	15.40	14.00
16	19.00	16.40	15.00
17	20.00	17.40	16.00
18	21.00	18.40	17.00
19	22.00	19.40	18.00
20	23.00	20.40	19.00

1

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV	UNIT	SCALE	PAGE
	A	mm	1:1	1/1

TITLE

333-1.0mm 胶壳 (SH) -A

DATE

2018-02-18

PART NO:

H10-XXFBA

DRAWING NO:

1

2

3

4

5

6

7

8

9