

1 2 3 4 5 6 7 8 9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫国防
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

	DIM.A	DIM.B	DIM.C
2x2	2.00	4.40	5.90
2x3	4.00	6.40	7.90
2x4	6.00	8.40	9.90
2x5	8.00	10.40	11.90
2x6	10.00	12.40	13.90
2x7	12.00	14.40	15.90
2x8	14.00	16.40	17.90
2x9	16.00	18.40	19.90
2x10	18.00	20.40	21.90
2x11	20.00	22.40	23.90
2x12	22.00	24.40	25.90
2x13	24.00	26.40	27.90
2x14	26.00	28.40	29.90
2x15	28.00	30.40	31.90
2x16	30.00	32.40	33.90
2x17	32.00	34.40	35.90
2x18	34.00	36.40	37.90
2x19	36.00	38.40	39.90
2x20	38.00	40.40	41.90

Specifications/备注 (Remark)

1-材料 (MATERIAL)
 胶芯: PA66 UL94V-0
 Housing:PA66 UL94V-0
 2-特性 (characteristics):
 额定电压: 250V AC/DC .
 Voltage Rating:250V AC/DC .
 额定电流: 2 AMP (AWG #22-28) .
 Raring Current:2 AMP (AWG #22-28) .
 接触阻抗: ≤10mΩ MAX.
 Contact Resistance:≤10mΩ MAX.
 绝缘阻抗: ≥1000MΩMIN.
 Insulating Resistance:≥1000MΩMIN.
 耐电压: 800V AC/MINUTE
 Withstanding Voltage:800V AC/MINUTE
 温度范围: -25度至+85度
 Temperture Range: -25°Cto +85°C


ORDERING INFORMATION

H 20-XX X X X

NO.OF PINS Per Row 02-40P	INSULATOR MATERIAL A:PA46 B:PA66 C:PA9T D:LCP	PACKING A:PE Bag B:TUBE C:TRAY
---------------------------------	--	---

SERIES NO
20:2.0mm

TYPE
F=FEMALE
M=MALE
P=PIERCE

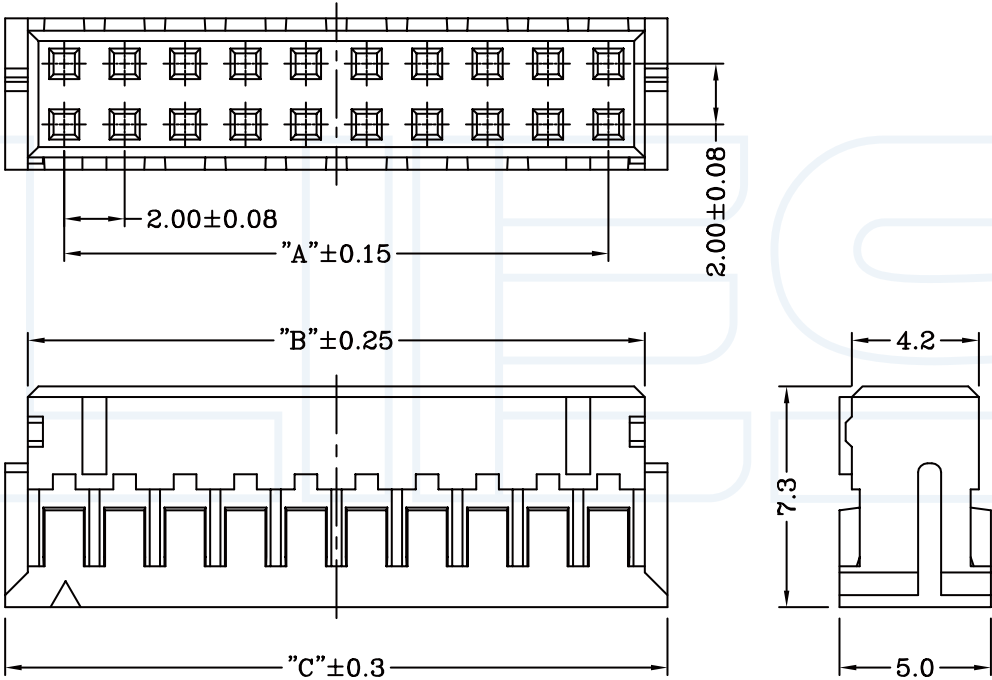

YLIES® 东莞市瑞翔精密连接器有限公司
 DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD
 Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

TITLE	373-2.0mm 胶壳双排 (PHD)	DATE	2018-02-18
PART NO:	H20-XXXBA	DRAWING NO:	

PROJECTON	REV	UNIT	SCALE	PAGE
	A	mm	1:1	1/1

1 2 3 4 5 6 7 8 9