

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4

5

6

7

8

9

ANGLE	± 5°	REV	LOCAS	DESCRIPTION	DESIGN	DATE	卫峰
X.XXX	± 0.05	01			DRAWN	DATE	尚伟
X.XX	± 0.15	02			CHECKED	DATE	吴汉学
X.X	± 0.25	03			AUDITED	DATE	龚劲松
X	± 0.50	04			APPROVED	DATE	eric

Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: LCP UL94V-0

Housing: LCP UL94V-0

端子: 磷青铜

Contact: Phosphor bronze

2-特性 (characteristics):

额定电流: 0.5 AMP.

Rating Current: 0.5 AMP.

接触阻抗: ≤30mΩ MAX.

Contact Resistance: ≤30mΩ MAX.

绝缘阻抗: ≥100MΩMIN.

Insulating Resistance: ≥100MΩMIN.

耐电压: 500V AC/MINUTE

Withstanding Voltage: 500V AC/MINUTE



温度范围: -55度至+105度

Temperature Range: -20°C to +85°C

ORDERING INFORMATION

HD - 2 F M B0 A X A

HDMI	INSULATOR MATERIAL	
NO.OF PER ROW	A:PBT	
1=ONE ROW	B:PA6T	
2=DUAL ROW	CONTACT: LCP	COLOUR
TERMINAL	SHAPE	B:BLACK
M:MALE	S:STRAIGHT	L:BLUE
F:FEMALE	R:RIGHT ANGLE	
	M:SMT	
	PACKING	
CONTACT PLATING	A:PE Bag	
FULL OF GOLD SEMI-GOLD	B:TUBE	
A0=0.8U"	C:TRAY	
... ..	D:BOX	
A9=30U"		
B9=30U"		

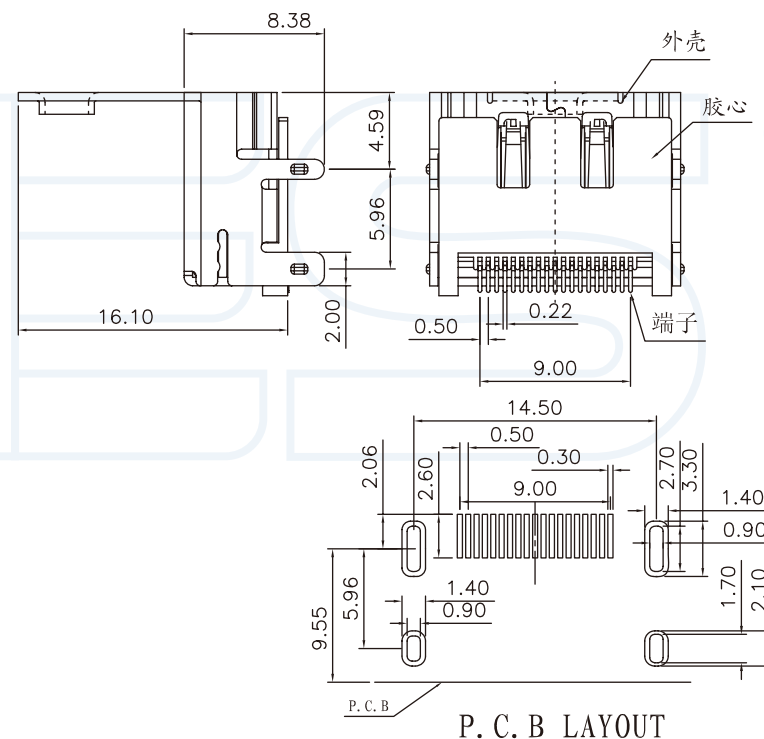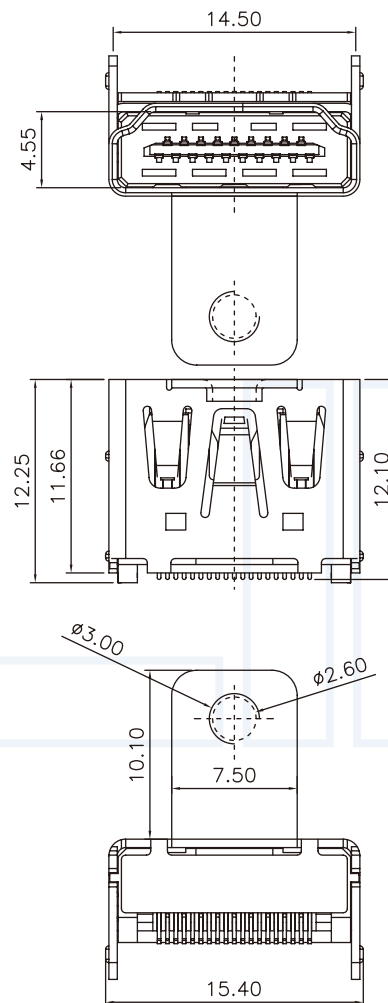

YLIES 东莞市瑞翔精密连接器有限公司
DONG GUAN YLIES PRECISE CONNECTOR CO.,LTD

Tel:0769-85381995 / Fax:0769-85493987 / Email: ylies@ylies.cn / Web:www.ylies.cn

PROJECTON	REV	UNIT	SCALE	PAGE
	A	mm	1:1	1/1

TITLE

497-HDMI 母座 贴片单耳

DATE

2018-02-18

PART NO:

HD-2FMB0EBD

DRAWING NO:

1

2

3

4

5

6

7

8

9